



Creation		Revision	
date:	26-NOV-2010	date:	
by:	Ivon LeBlanc	by:	

Hose Caddy Drum Lock

This instruction sheet will assist in the Cadman 6010 Hose Caddy drum lock upgrade.

⚠ WARNING:

This upgrade must be done **ONLY** when the machine is shut down and is in a non-loaded condition. This means that no fluid is being pumped through the motor and all mechanical and hydraulic tension has been released from the hose rewind system.



Remove brake handle.




Remove 5 bolts. Remove side shield.



Re-install brake handle and tighten to prevent drum rotation.

⚠ WARNING:

Replacing the drum lock without the brake engaged may result in serious injury and/or death.

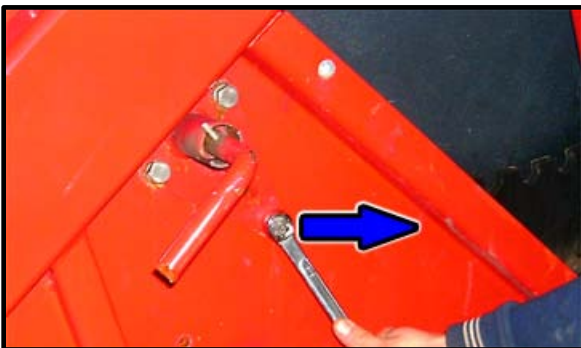

Remove 3 bolts.




Remove drum lock



Assemble new drum lock as shown.



Install drum lock handle with 3 bolts.

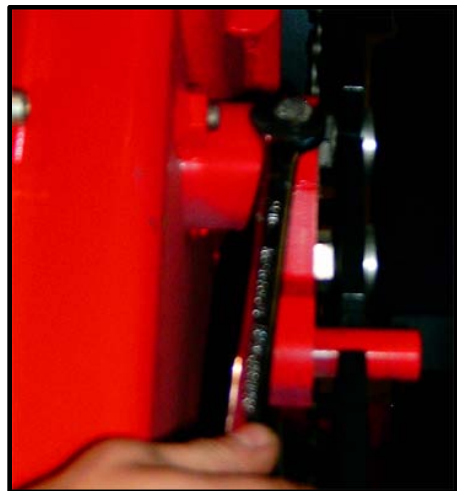

Install drum lock pin using bolt provided.



Engage drum lock, remove brake handle, re-install side shield and brake handle.

⚠ WARNING:

It is very important to replace the side shield to cover the exposed chain to prevent injury and/or death.

Congratulations you have successfully completed the Drum Lock upgrade.