

# TR-MAN-6003LUBE 6003 CADDY LUBRICATION



Please refer to you operator’s manual for further instructions.

ITEM	SPECIFICATION	FREQUENCY
Drain and clean out the hose.	Use a clean-out ball (sold separately) following the instructions provided with the unit. OR Flush with water (minimum of 1000 gallons [4500 liters]) to completely purge the hose.	After each use
Lubricate Grease Points	NGLI Grade 2 grease	Every 3 months
Grease Drum Bearings	NGLI Grade 2 grease	Every 3 months
Clean	Wash down unit and remove debris and dirt	As needed
Fasteners	Tighten/replace fasteners as required	As needed

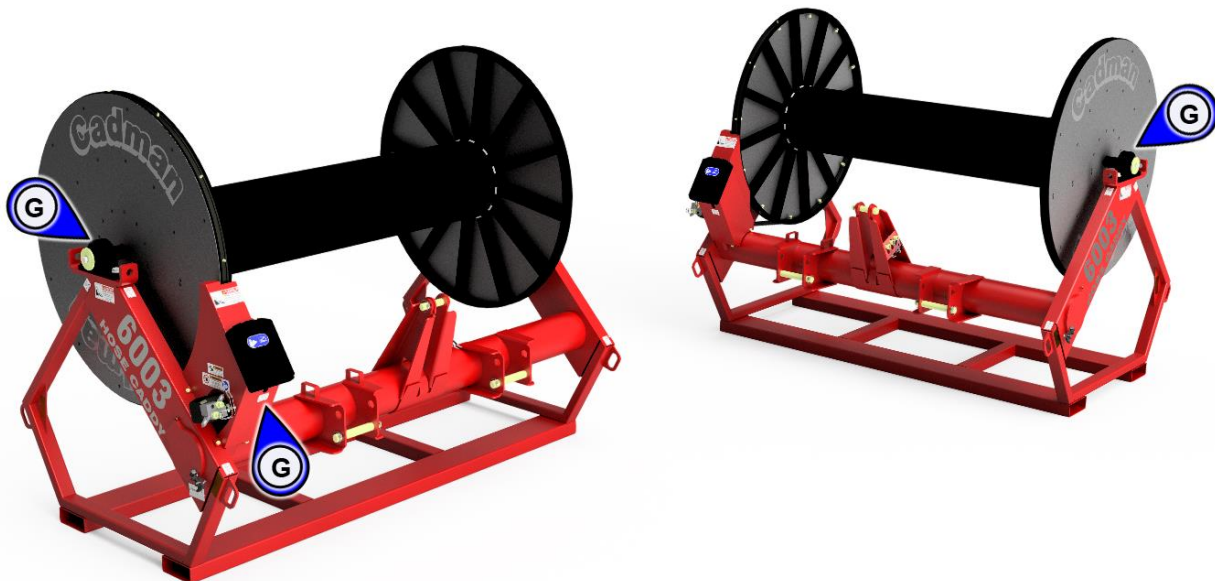


Figure 1 - 6003 Hose Caddy Grease Points

img-00167



Operating the equipment with missing and/or damaged guards may lead to operators, spectators, and/or objects to come into contact with moving parts. This will cause serious injury and/or death to operators and/or spectators. This will also damage the equipment.