

# TR-MAN-6010LUBE 6010 CADDY LUBRICATION



Please refer to you operator’s manual for further instructions.

Maintenance Item	Figure	Frequency
Drain and clean out the hose.	Use a clean-out ball (sold separately) following the instructions provided with the unit. OR Flush with water (minimum of 2000 gallons [7600 liters]) to completely purge the hose.	After each use
Lubricate all grease points.	NGLI Grade 2 grease	Every 3 months
Grease Drum Bearings	NGLI Grade 2 grease	Every 3 months
Lubricate all chains	NGLI Grade 2 grease	Every 3 months
Fasteners	Tighten/replace fasteners as required	As needed
Tire Pressure	Read tire label for requirements	Each use
Wheel Nuts/Bolts	110 ft•lbs [149 N•m]	Every 6 month
Clean	Wash down unit and remove debris and dirt	As needed

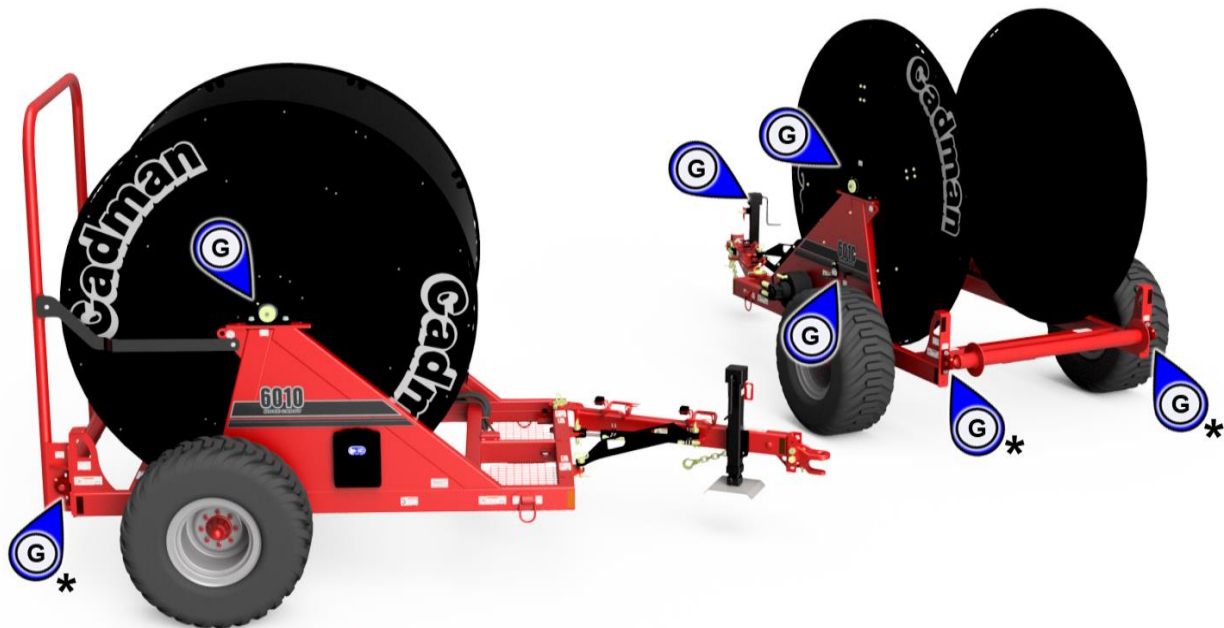


Figure 1 - Grease Points (\* if equipped)

img-00437-A



Operating the equipment with missing and/or damaged guards may lead to operators, spectators, and/or objects to come into contact with moving parts. This will cause serious injury and/or death to operators and/or spectators. This will also damage the equipment.